

## Babcock Davis

### ITK Series Access Panel / Fire Rated

#### Features:

- Fire rated walls and ceilings
- Wall rating U.L. 1-1/2 hour B door
- Ceiling rating Warnock Hersey 3 hour
- Continuous hinge
- Insulation 2" thick and fire retardant
- Frame 16 gauge cold rolled steel
- Door 20 gauge cold rolled steel
- Flange 1" wide
- Flush key / knurled knob
- Gray prime finish with baked on rust inhibitor
- Rough opening 1/4" over

#### Options:

1551 hardware pack includes screw-in Knurled Knob and Key (to be used if lost, Already included with all ITK Access Panels)

#### Stocked Product


##### Sizes:

12 x 12, 14 x 14, 16 x 16, 18 x 18,  
22 x 30, 24 x 24, 24 x 30, 24 x 36

1551 Hardware Pack




**KK** Knurled knob/key operated latch bolt Patented ball bearing latch bolt operated by a screw-in type knurled knob or flush key. This is the standard latching mechanism on our fire rated models.

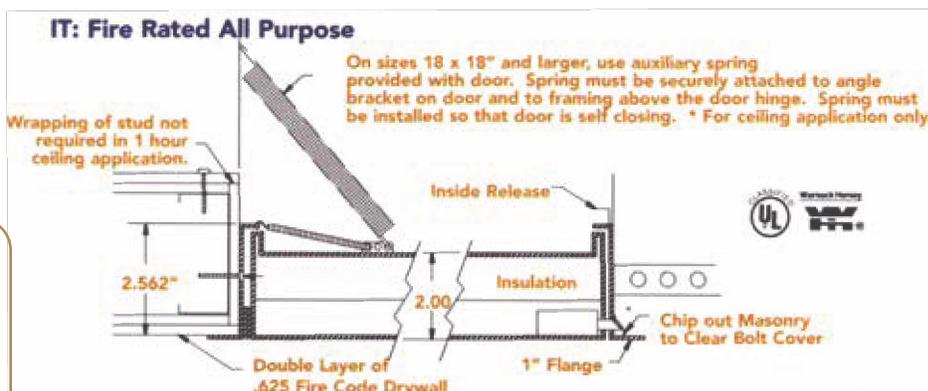

### NTC Series Access Panel / Non Fire Rated

#### Features:


- All purpose flush access panel for walls and ceilings
- Concealed spring pin hinge on sizes up to 24" x 36"
- Frame 16 gauge cold rolled steel
- Door 14 gauge cold rolled steel
- Flange 1" wide exposed
- Screwdriver cam latch
- Gray prime finish with baked on rust inhibitor
- Rough opening 1/4" over



**CS** Screwdriver operated cam latch Most commonly used for standard applications.



**NT:** Non-rated flush panel with 1" flange for installation in any application.

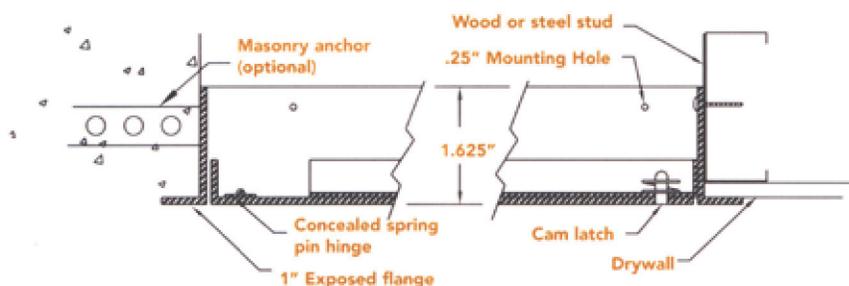

#### Stocked Product

Sizes: 08 x 08, 12 x 12, 14 x 14, 16 x 16,  
18 x 18,  
22 x 22, 24 x 24, 24 x 30, 24 x 36