

## HES

### 1006 - Series Electric Strike

#### Features:

- Innovative dual interlocking plunger
- Stainless steel construction
- Electrical .45 amps @ 12 VDC .25 amps @ 24 VDC
- 3000 lb static strength
- Dual voltage, field selectable, 12 or 24 VDC
- Internally mounted solenoid fail secure
- Non-handed



Note: Shown with optional J Faceplate

#### Faceplate Options:



#### AD

For Use with mortise locksets with a normally extended 1" deadbolt without a deadlatch.  
Compatible Locksets: Sargent (7700 & 8100 series), Schlage, Yale (8700)



#### KD

For use with Schlage, Sargent (8100), Yale mortise locks. Mortise locksets with deadlatch positioned above the latch bolt.



#### ND

For use with Schlage, Sargent (8100), Yale mortise locks. Mortise locks where the deadbolt is used for night latch function only.



#### J

For use with cylindrical locksets up to 3/4" throw and all locksets with center lined belts.  
Compatible with Arrow, Best, Corbin, Falcon, Russwin, Sargent, Schlage, Yale



#### KM

For use with Best, Corbin, Falcon, Sargent (8200).  
Mortise locks with a deadlatch positioned below the latch bolt.



#### NM

For use with Corbin, Falcon, Sargent (8200). Mortise locksets with a deadlatch positioned below the latch bolt and where dead bolt is used for night latch function only.



#### J-2

For use with cylindrical locksets with up to a 3/4" throw, in wood frame applications.



#### HD

For use with: Mortise locksets with a 1" deadbolt without a deadlatch. Strike will not release when deadbolt is extended. Compatible locksets: Sargent (7700 & 8100 series), Yale (8700)

#### Stocked Product

Item	Finish
1006 Body	630
1006 AD	613
1006 J	613, 630
1006 J2	613, 630
1006 KD	630
1006 KM	630
1006 HD	613, 630
1006 ND	630
1006 NM	630

## HES

### 2005M3 Smart / Pac III

2005M3 Is an In-line power controller able to receive input voltages from 12-32VAC or DC. Output 12VDC or 24VDC, depending on input voltage

#### Standard Features

- Built-in bridge rectifier
- Reduces initial voltage by 25% to extend the life of the electric strike
- Includes built-in resettable fuse, MOV, voltage regulation and input voltage level indicating and unit status
- For use with 1006, input voltage must be DC

#### Optional Features:

- Addition of SMART Pac® III to any electric strike extends the
- 5-year no-fault warranty to a 10-year no-fault warranty.



### 4500 - Series Low Profile Fire Rated Strike

#### Features:

- 1-3/8" depth for installation in 2" frames with 1/2" drywall penetration
- 3000 lb static strength
- Heavy duty stainless steel construction
- 5 year limited warranty
- Non-handed
- Two faceplates provided to accommodate a variety of locksets

#### Specifications:

- UL 10C 3 hour fire rated in fail secure mode
- BHMA 156.31 Grade 1

#### Faceplates (Included):



#### J

For use with cylindrical locksets up to 3/4" throw and all locksets with center lined belts. Compatible with Arrow, Best, Corbin, Falcon, Russwin, Sargent, Schlage, Yale



#### KD

For use with Schlage, Sargent (8100), Yale mortise locks. Mortise locksets with deadlatch positioned above the latch bolt.



#### Stocked Product

Item	Finish
4500	630

## HES


### 5000 - Series Electric Strike

#### Features:

- Dual voltage 12 or 24 VDC/VAC • Field selectable fail secure / fail safe • Forcing strength rating 1,500 lbs
- Dynamic force rating 70ft-lbs
- Endurance rating 250,000 cycles (factory tested to over 1,000,000)
- Internally mounted solenoid
- Non-handed
- Trim enhancer (goof plate) included
- Five year warranty
- Strike Body Depth 1-1/16"



(NOTE: Shown with optional 501 Faceplate)

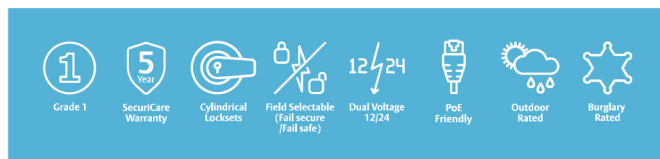


### 5200 - Series

- In-frame horizontal adjustability
- Heavy duty - for use with up to 3/4" latchbolts
- Dual voltage 12 or 24 VDC/VAC
- Field selectable fail secure / fail safe
- Forcing strength rating 1,500 lbs
- Dynamic force rating 70ft-lbs
- Endurance rating 250,000 cycles (factory tested to over 1,000,000)
- Internally mounted solenoid
- Non-handed
- Trim enhancer (goof plate) included
- Five year warranty
- Strike Body Depth 1-3/16"



(NOTE: Shown with optional 501 Faceplate)

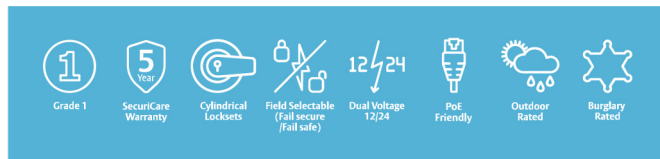

#### Faceplate Options:



#### 501

Square corner, flat faceplate. For use with cylindrical locksets in ANSI metal jambs. For use with latch bolts up to 1/2" throw



#### 501A

Radius corner, flat faceplate. For use with cylindrical locksets. For use with latch bolts up to 1/2" throw includes universal mounting tabs. Aluminum frames



#### 503

For use with cylindrical locksets. For use with latchbolts up to 1/2" throw. Includes universal mounting tabs. Aluminum frames.

#### Stocked Product

Item	Finish
5000 and 5200	630
501 faceplate	630
501A faceplate	613, 630
503 faceplate	613, 630

## HES

### Electric Strike

#### 8000 - Series

This field selectable fail safe/fail secure unit requires no cutout on the frame for fast, easy installation. It accommodates 1/2-5/8" latchbolts (with 1/8" door gap). With patented vertical adjustability to accommodate door sag or misalignment.



(NOTE: Shown with optional 801 Faceplate)

#### Standard Features (8000 & 8300):

- ANSI/BHMA 156.31, Grade 1
- No cutting on frame required
- Vertical adjustability to accommodate door sag
- Tamper resistant
- Field selectable Fail secure/fail safe
- DC Continuous Duty/AC Intermittent Duty
- Five year limited warranty
- .24 Amps @ 12VDC
- .12 Amps @ 24VDC
- DC Continuous Duty/AC Intermittent Duty

#### 8300 - Series (Fire Rated)

8300 Series is the fire rated version of the 8000 Series.

#### Specifications:

UL 10C, Fire Rated



(NOTE: Shown with optional 801 Faceplate)

#### Stocked Product

Item	Finish
8000	630
8300	630
Faceplate Options: 801 - 4-7/8" x 1-1/4" square corner	
Finish: 613, 630	

#### 9500 - Series (Fire Rated)

9500 series is the fire rated version of the 9600 series. Designed for use with 3' or 4' exit devices



#### Specifications:

- NFPA 252, ASTM E152
- UL 10C fire rated, 90 minutes (fail secure only)
- UL305
- Warnock Hersey UBC 7-297, UBC 7-294
- Electrical .45 Amps @ 12VDC  
. Amps @ 24VDC
- ANSI / BHMA 156.31 Grade 1
- NFPA Specification 252

#### Features of both:

- Dual voltage 12/24 VDC
- Heavy duty designed for 3' or 4' exit device
- Field selectable fail secure / fail safe
- Tamper resistant - heavy duty
- Completely surface mounted
- Non-handed
- Horizontal lockdown screws
- Accommodates up to a 3/4" throw pullman latch
- 5 year warranty

#### 9600 - Series (Non Fire Rated)

Designed for use with 3' or 4' exit devices



#### Specifications:

- UL1034 burglary-resistant rated
- ANSI/BHMA, 156.31 Grade 1 (#E09731, #E09732)
- Patented Design



#### Stocked Product

Item	Finish
9500	630
9600	613, 630