


Ives - Residential

07 WINDOW LOCKS

- Material Brass or Aluminum
- Vertical and horizontal cam action for snug non rattling fit
- Heavy gauge spring for long wearing action
- Meets ANSI A156.16
- Include screws

Stocked Product

07A3 Bright Brass
07MB 605, 619, 625, 626

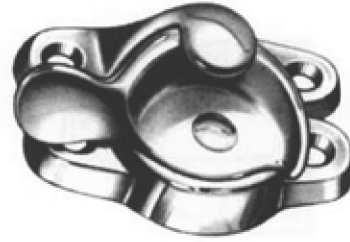


Base 15/16" x 2-5/8"
Strike 5/8" x 2-5/8"

2 ELBOW CATCH

Plate 1-3/8" X 5/8"
Strike 1-3/16" X 5/8"
Material Brass or Aluminum

Stocked Product

2A3 Bright Brass
2A92 Aluminum

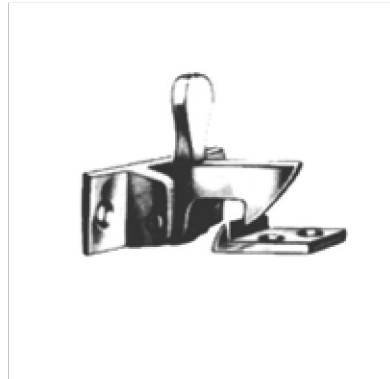

25 SCREEN DOOR PULL

CTC 4-1/8"
Material Aluminum
Overall length 4-7/8"
Projection 1-5/32"

Stocked Product


25A92 Aluminum



Ives - Residential

42 POCKET DOOR BOLT

Plate size 3-1/16" x 1-1/8"
 Mortise depth 5/8"
 Material Solid brass



Stocked Product

Finishes: 625, 626

059 HAND RAIL BRACKET

Base 2-1/4" (H) x 1-3/8" (W)
 Base to center of rail 2-7/16"
 Material Solid brass or aluminum



Stocked Product

Material - Aluminum

| | | |
|--------|---------------|------|
| 059A14 | Bright Nickel | US14 |
| 059A3 | Bright Brass | US3 |
| 059A5 | Satin Brass | |
| | Blackened | US5 |
| 059A92 | Aluminum | |

Material - Brass

| | | |
|--------|--------------|------|
| 059B15 | Satin Nickel | US15 |
|--------|--------------|------|

59 HAND RAIL BRACKET

Base 2-13/16" (H) x 1-1/2" (W)
 Base to center of rail 2-3/4"
 Material Solid brass or aluminum



Stocked Product

Material - Aluminum

| | | |
|-------|-------------|-----|
| 59A5 | Satin Brass | |
| | Blackened | US5 |
| 59A92 | Aluminum | |


Material - Brass

| | | |
|-------|--------------|------|
| 59B15 | Satin Nickel | US15 |
|-------|--------------|------|

Ives - Residential

060 FLEXIBLE DOOR STOP

Projection 3"
Material: Steel

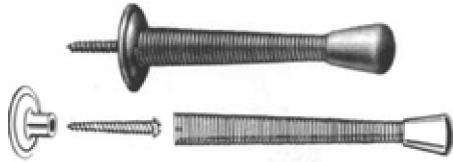

Stocked Product

| | | |
|---------|---------------|------|
| 060 F14 | Bright Nickel | US14 |
| 060 F5 | Satin Brass | |
| | Blackened | US5 |

60 DOOR STOP

Projection 3-3/4"
Material: Solid Brass or Aluminum




Stocked Product

| | | |
|----------------------------|--------------------|-----|
| Material - Aluminum | | |
| 60A3 | Bright Brass | US3 |
| 60A92 | Aluminum | |
| Material - Brass | | |
| 60MB | 609, 613, 619, 626 | |

061 FLEXIBLE DOOR STOP

Projection 4"
Material: Steel

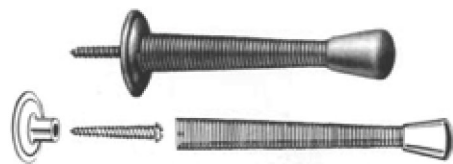

Stocked Product

| | | |
|---------|---------------|------|
| 061 F14 | Bright Nickel | US14 |
|---------|---------------|------|

61 DOOR STOP

Projection 3"
Material: Solid Brass or Aluminum



Stocked Product

| | | |
|----------------------------|-------------------|-------|
| Material - Aluminum | | |
| 61A92 | Aluminum | |
| 61A3 | Bright Brass | US3 |
| 61A14 | Bright Nickel | US14 |
| 61A10B | Oil Rubbed Bronze | US10B |
| Material - Brass | | |
| 61MB | 619, 625, 626 | |


Ives - Residential

69 HINGE PIN DOOR STOP

Door opening adjustments 70° to 100° Material Steel

Stocked Product

| | |
|-------|---------------|
| 69F14 | Bright Nickel |
| 69F3 | Bright Brass |

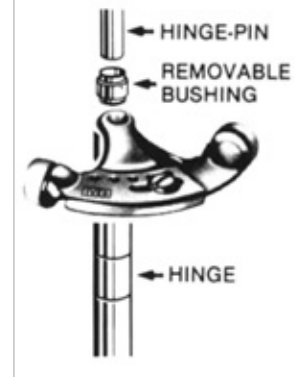

70 HINGE PIN DOOR STOP

Door opening adjustments 85° to 125°
Material Brass (B) or aluminum (A)

Stocked Product

| | |
|-------|---------------|
| 70A14 | Bright Nickel |
| 70A3 | Bright Brass |
| 70A92 | Aluminum |
| 70B | 619 |



221 FLUSH PULL

| | |
|------------------|-------------|
| Bore | 2-1/8" |
| Overall Diameter | 2-7/16" |
| Material | Solid brass |

Stocked Product

221B: 605, 609, 613, 619, 625, 626



Ives - Residential

223 FLUSH PULL

Size 3-9/16" x 1-5/16" x 1/2"
Material Solid brass

Stocked Product

223B: 626



227 FLUSH PULL

Overall size 3-5/8" x 1-3/4" x 9/16"
Material Solid brass

Stocked Product

227B: 613, 626




261 Flush Bolt

- Polished cast brass.
- A compact flush bolt of high quality incorporating most of the features of the superb No. 262 Flush Bolt.
- Deep cup provides good finger hold, allows easy operation.
- Brass bolt automatically held in retracted or projected position by unique spring design.
- Features sharp, crisp lines and superior finish.
- Packed with screws for bolt and strike.

P/N 261
Rod Backset 15/32"
Dia. of Bolt Head 5/16"
Throw 3/4"

Stocked Product


261: 619

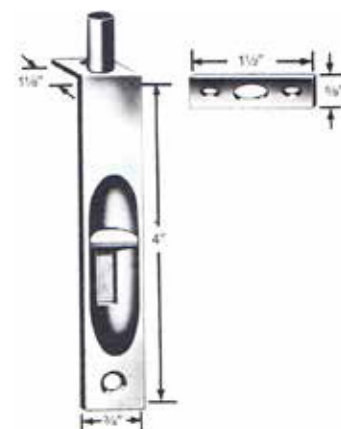

Ives - Residential

335 Heavy Duty Roller Catch

Face plate 2-1/4" x 7/8"
Bore 3/4" x 1-3/4"
Strike 2-1/4" x 1-5/8"
Material Solid brass or steel




Stocked Product

335B 605, 613, 619, 625, 626

336 Heavy Duty Roller Catch

P/N 336
Face Plate 2-1/4" x 7/8"
Bore 3/4" x 1-3/4"
Strike 2-1/4" x 7/8"
Lip 1-1/8" to Center




Stocked Product

336: 613, 619, 626

345 Adjustable Ball Catch

P/N 345
Face Plate 1-1/2" x 3/4"
Bore 9/16" x 7/8"
Strike 1-1/2" x 25/32"
Lip 13/32" to Center



Stocked Product

345: 613, 619


Ives - Residential

347 BALL CATCH

Face plate 2-1/8" x 1"
Bore 7/8" x 1-1/4"
Strike 2-1/8" x 1-3/8"
Material Solid brass

Stocked Product

347B 605, 609, 613, 619, 625, 626

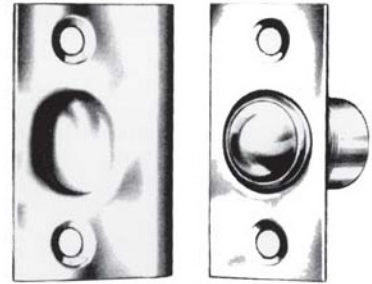


349 BALL CATCH

Face Plate 2-1/8" X1"
Bore 7/8" X 1-1/4"
Strike 2-1/8" X 1-3/8"
Lip 7/8" to Center

Stocked Product

349B 613, 619, 625, 626

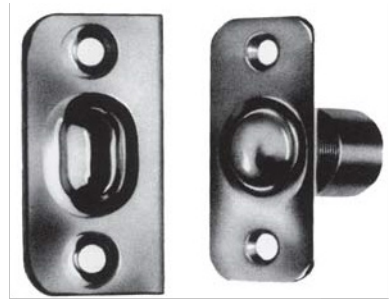

571 COAT & HAT HOOK

Projection 3"
Base 1-3/4" (H) x 1-7/32" (W)
Material Aluminum

Stocked Product

571: A3 Bright Brass



581 WARDROBE HOOK

Projection 1-11/16"
Base 1-1/8" (H) x 1-1/8" (W)
Material Brass or aluminium

Stocked Product

Material Aluminium

581A92 Aluminium

Material Brass

581MB 626



Ives - Residential

698 DOOR VIEWER / U698 UL

190° for 1-3/8" - 2-1/8" door
9/16" hole size

Stocked Product

| | |
|------|----------|
| 698 | 605, 626 |
| U698 | 605, 626 |



990 PASSAGE

- Solid brass body
- Fits door 1-3/8" to 1-1/2"
- Pre-assembled for doors opening left to right. Plates are reversible for opening left to right
- Solid brass strike plate
- Decorative coined edges

Stocked Product

990: 613, 619, 625, 716



991 PRIVACY

- Solid brass body
- Fits door 1-3/8" to 1-1/2"
- Pre-assembled for doors opening left to right.
- Solid brass strike plate and turn knob
- Decorative coined edges

Stocked Product


991: 605, 613, 619, 625, 716



Ives – Commercial

Architectural Door Trim 8200 SERIES PUSH PLATE

- Made from the finest architectural aluminum, brass, and stainless steel.
- All aluminum, brass, and stainless steel Push Plates meet ANSI A156.6 requirements for .050" thickness.
- Each Push Plate is packaged individually wrapped with mounting screws.



8200 Push Plate

Stocked Product

Finishes: 10B, 32D

Size: 4" x 16"

Contact our sales department for availability of other finishes and sizes.

8300 PULL PLATES

- Made from the finest architectural aluminum, brass and stainless steel.
- All aluminum, brass, and stainless steel Pull Plates meet ANSI A156.6 requirements for .050" thickness.
- Each Pull Plate is packaged individually wrapped with mounting screws.



8302 Pull Plate 6" C to C

8302 Pull Plate 8" C to C

Stocked Product

Center to Center Pull 10B, 32D 8302 8"

Center to Center Pull 10B, 32D


Size: 4" x 16"

Ives - Commercial

Series 8400 DOOR PROTECTION PLATES .050" Thickness (Commercial Kick plates)

Features:

- Door Protection Plates are fabricated from the finest architectural brass, and stainless steel.
- All aluminum, brass, bronze and stainless steel Door Protection Plates meet ANSI A156.6 requirements for .050" thickness.
- Optional Beveling-For beveling of top and two sides of plates suffix with B3E, and for beveling of four sides suffix with B4E, Special order only
- Each plate is packaged carefully wrapped in strong kraft paper with #6 x 5/8" oval head, undercut sheet metal screws plated to match, for easy installation on hollow metal, laminate, or wood doors. All plates are packaged in heavy duty corrugated cardboard.



Kick Plates

- Protect the bottom of the push side of doors subject to scuffing from foot traffic.
- Recommended for all doors subject to normal use (especially doors using a closer).

Stocked Product

| | |
|----------------------|---------------|
| 8" x 34" | 10B, 32D, 625 |
| 10" x 34", 12" x 34" | 10B, 32D |

Ives - Commercial

Full Mortise Hinges - 3 Knuckle

3PB1 Steel with steel pin.

PLAIN BEARING • LOW FREQUENCY • STANDARD WEIGHT

For use on Medium Weight Doors with Low Frequency Usage, not intended for use with door closing devices

- Hinges tested to ANSI - A156.1.
- Dimensions & tolerances conform to ANSI - A156.7.
- 3PB1 Steel Description conforms to ANSI - A8133.
- Packed with wood and machine screws.

| Size (Inches) | Size (MM) | Gauge |
|---------------|-----------|-------|
| 4.5 x 4.5 | 114 x 114 | .134 |



Stocked Finishes

26D
4 1/2" x 4 1/2" size only

3CB1 Steel with steel pin. 3CB1 Stainless Steel with Stainless Steel pin. (630 finish only) Non-Removable Pin suffix "NRP"

CONCEALED BEARING • MEDIUM FREQUENCY • STANDARD

WEIGHT For use on Medium Weight Doors with Medium Low Frequency Usage

- Hinges tested to ANSI - A156.1.
- Dimensions & tolerances conform to ANSI - A156.7.
- 3CB1 Steel description conforms to ANSI - A8112.
- 3CB1 Stainless description conforms to ANSI - A5112.
- Packed with wood and machine screws.

| Size (Inches) | Size (MM) | Gauge |
|---------------|-----------|-------|
| 4.5 x 4.5 | 114 x 114 | .134 |



Special order

- Contact sales department for other sizes & finishes.

Stocked Finishes

3CB1 4 1/2 X 4 1/2 26D, 32D
3CB1 4 1/2 X 4 1/2 NRP 26D, 32D, USP

Ives - Commercial

Full Mortise Hinges - 5 Knuckle

5PB1 Steel with steel pin

Non-Removable Pin Suffix "NRP"


PLAIN BEARING • LOW FREQUENCY • STANDARD WEIGHT

For use on Medium Weight Doors with Low Frequency Usage, not intended for use with door closing devices.

- Hinges tested to ANSI - A156.1.
- Dimensions & tolerances conform to ANSI - A156.7.
- Packed with wood and machine screws.

Size (Inches) Size (MM) Gauge

| | | |
|-----------|-----------|------|
| 4.5 x 4.5 | 114 x 114 | .134 |
|-----------|-----------|------|



Stocked Finishes

26D 4 1/2" x 4 1/2" size
only Also stocked NRP

5BB1 Steel with steel pin **5BB1** Stainless Steel with stainless steel pin (630 finish)

Non-Removable Pin suffix "NRP"

2 BALL BEARING • MEDIUM FREQUENCY • STANDARD WEIGHT

For use on Standard Weight Doors with Medium Frequency Usage

- Hinges tested to ANSI - A156.1.
- Dimensions & tolerances conform to ANSI - A156.7.
- 5BB1 Steel description conforms to ANSI - A8112.
- 5BB1 Stainless description conforms to ANSI - A5112.
- Packed with wood and machine screws.

Size (Inches) 4.5 x 4.5 4.5 x 4 5 x 4 1/5 Size

(MM) 114 x 114 114x102 127 x 114

Gauge .134 .134 .134

| | | |
|--|--|--|
| | | |
| | | |
| | | |



Stocked Finishes

| | |
|---------------------|---------------|
| 4 -1/2" x 4" | USP, 26D |
| 4 1/2" x 4 1/2" | USP, 26D, 32D |
| 4 1/2" x 4 1/2" NRP | USP, 26D, 32D |
| 5" x 4-1/2" | 26D, 32D |

Ives - Commercial

Full Mortise Hinges - 5 Knuckle

5BB1HW Steel with steel pin
stainless steel pin (630 finish only)
"NRP" strike

5BB1HW Stainless Steel with
Non-Removable Pin suffix

4 BALL BEARING • HIGH FREQUENCY • HEAVY WEIGHT
For use on Heavy Weight Doors or High Frequency Usage

- Hinges tested to ANSI - A156.1.
- Dimensions & tolerances conform to ANSI- A156.7.
- 5BB1 HW Steel description conforms to ANSI - A8111.
- 5BB1 HW Stainless description conforms to ANSI - A5111.
- Packed with wood and machine screws.

| Size (Inches) | Size (MM) | Gauge |
|---------------|-----------|-------|
| 4.5 x 4.5 114 | 114 | .180 |



Stocked Finishes

26D, 32D
4 1/2" x 4 1/2" size only
Also stocked NRP

Ives - Commercial

FB358 (old number FB6W)

MANUAL FLUSH BOLT WOOD

Dimensions:


Body Size: 1" x 6-3/4" x 1-3/8" Deep Guide
Size: 1" x 2-1/2" x 5/64" Thick Strike Size:
15/16" x 2-1/4" x 5/64" Thick

Stocked Product

FB358 10B, 26D

Top or bottom bolts

- UL Listed 90 minutes on 8'0" x 10'0" opening
- Non-handed.
- Bolts have 3/4" throw with a 7/8" vertical adjustment.
- Meets ANSI/BHMA A156.16, L04261.

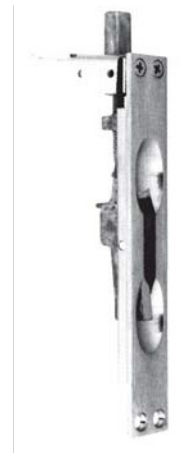

FB458 (old number FB6)

MANUAL FLUSH BOLT METAL

Dimensions:

Body Size: 1" x 6-3/4" x 1-13/8" Deep
Guide Size: 1" x 2" x 5/64" Thick
Strike Size: 15/16" x 2-1/4" x 5/64" Thick
Rod: 1/4-20 threaded rod

Stocked Product

FB458 10B, 15, 26D, US3

Top or bottom bolts

- FB458 UL Listed fire doors (3 hours for metal / 90 minutes for wood)
- Bolt tip is 1/2" diameter
- Bolts have 3/4" throw with a bolt backset of 3/4"
- Standard rod length is 12"
- Meets ANSI/BHMA A156.6, L04251.



DP1 - Dust proof strike

Stocked Product

DP1 26D



DP2 - Dust proof strike

Face plate 1-5/8" x 3-1/2' x 1/8" Thick

Stocked Product

DP2 10B, 26D



Ives – Commercial

FLUSH BOLT



AUTOMATIC FOR METAL *FB31P* PAIR


Top and bottom bolts Both bolts are non-handed, but are not identical. The top bolt has no spring tension, resulting in lower actuation force with a smoother operation.

Dimensions:

Body Size: 1" x 6-3/4" x 2" Deep
 Guide Size: 1" x 1-27/32" x 27/32" x 3/32" Thick
 Strike Size: 15/16" x 2-1/4" x 1/16" Thick Rub
 Plate Size: 1-1/4" x 1-11/16" 3/64" Thick Auxiliary
 Fire Latch Size: 1" x 1-3/4" x 3-1/4" Deep

Stocked Product

FB31P 10B, 32D

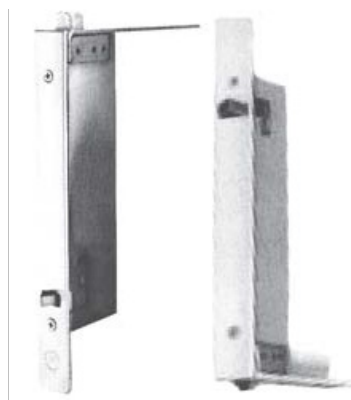

AUTOMATIC FOR WOOD *FB41P* PAIR

Top and bottom bolts Both bolts are non-handed, but are not identical. The top bolt has no spring tension, resulting in lower actuation force with a smoother operation.

Dimensions:

Body Size: 1" x 8-1/2" x 2" Deep
 Guide Size: 1" x 6" x 1/8" Thick
 Strike Size: 15/16" x 2-1/4" x 1/16" Thick
 Rub Plate Size: 1-1/4" x 1-11/16" 3/64" Thick
 Auxiliary Fire Latch Size: 1" x 1-3/4" x 3-1/4" Deep

Stocked Product

FB41P 10B, 32D



CONSTANT LATCH FLUSH BOLTS *FB51P* PAIR

Top and bottom bolts FB51P combines FB51T constant latching top bolt with FB31B automatic bottom bolt. Non-handed.

Dimensions:

Body Size: 1" x 6-3/4" x 2" Deep
 Guide Size: 1" x 1-27/32" x 11/16" x 3/32" Thick
 Strike Size: 15/16" x 2-1/4" x 1/16" Thick
 Rub Plate Size: 1-1/4" x 1-11/16" 3/64" Thick
 Auxiliary Fire Latch Size: 1" x 1-3/4" x 3-1/4" Deep


Stocked Product

FB51P 10B, 32D

Ives – Floor Stops & Holders

FS13 Dome Stop

- Standard FS13 for use where no threshold is used.
- Heavy-Duty Cast Dome Stops constructed of brass.
- Unique riser design of R14 (below) allows easy conversion to threshold application.
- Units are packed with fasteners sufficient for mounting in all types of floor construction, including concrete.
- Meets ANSI/BHMA 156.6, L12141.




Overall Height 1"
Base Height .. 5/32"
Base Diameter 1-3/4" Round

Stocked Product

FS13 605, 613,
625, 626

FS17 Dome Stop

- One piece dome stop for use with thresholds.
- Heavy-Duty Cast Dome Stops constructed of brass.
- Units are packed with fasteners sufficient for mounting in all types of floor construction, including concrete.
- Meets ANSI/BHMA 156.1, L12161.



Overall Height 1-11/32"
Base Height .. 1/2"
Base Diameter 1-3/4" Round


Stocked Product

FS17 613, 626

R14 Riser only

- Adapts the FS13 Dome Stop to threshold use.
- Brass Die Cast Construction.
- Meets ANSI/BHMA 156.1, L12161 when used with FS13 Dome Stop.

Not Included



Riser Height .. 5/16"
Base Diameter 1-3/4" Round

Stocked Product

R14 605, 613,
625, 626

Ives - Floor Stops & Holders

FS436/FS438 Floor Dome Stop

- FS436 For doors without threshold
- FS438 For doors with threshold or undercut doors
- Heavy Duty cast dome stops constructed of brass, bronze, or aluminum
- Meets ANSI A156.6 L12141 for brass and L32141 for aluminum
- Packed with wood screw and plastic anchor



FS436
Overall height: 1"
Base height: 3/16" Base
diameter: 1-3/4" x 2" oval



FS438
Overall height: 1-3/8"
Base height: 9/16"
Base diameter: 1-3/4" x 2" oval

Stocked Product

| | |
|-------|--------------|
| FS436 | 10B, 26, 26D |
| FS438 | 10B, 26, 26D |

FS441 Floor Door Stop

- Cast material
- Accommodates doors undercut up to 1-1/2"
- Designed for commercial applications
- Non-marring rubber tip
- Conforms to ANSI A156.16
L12131 for brass and
L32161 for aluminum
- Packed with expansion shield and Tampin
- 2-11/16" x 1-5/8" x 2-1/8" (L x W x H)



Stocked Product

| | |
|-------|----------------------------|
| FS441 | 605, 613, 619, 625, 626 |
|-------|----------------------------|

FS444 / FS448 Heavy Duty Floor Stops

- Cast material
- Accommodates doors undercut up to 2-1/2"
- Designed for commercial applications
- Non-marring rubber tip
- Conforms to Fed. Spec. No. 1328E
- Conforms to ANSI A156.16
L12131 for brass and
L32131 for aluminum
- FS444 Packed with expansion shield and lead shield,
for masonry type mounting
- FS448 Packed with wood screws, for drywall mounting

FS444



FS448



Stocked Product

| | |
|-------|--------------------|
| FS444 | 613, 619, 625, 626 |
| FS448 | 613, 626 |

Ives – Floor Stops & Holders

FS446 / FS450 HD Floor Door Stop & Holders

- Cast material
- Accommodates doors undercut up to 2-1/2"
- Designed for high traffic areas in commercial applications
- Resilient, non marring rubber tip
- Conforms to Fed. Spec. No. 1329E
- FS446 Conforms to ANSI A156.16 L11371 for brass and L31371 for aluminum
- FS446 Packed with expansion shield and lead shield, for masonry type mounting
- FS450 Packed with wood screws, for drywall mounting



Stocked Product

| | |
|-------|----------|
| FS446 | 10B, 26D |
| FS450 | 10B, 26D |

FS455 Door Holder

- Cast brass or aluminum construction.
- Non-marring rubber shoes have corrugated bottoms to provide secure grip and a shank which forms its own thread when screwed into threaded cavity of holder. When worn, shoes are easily replaced.
- Door-to-floor clearances of 2' or less.
- Meets ANSI/BHMA 156.16, L11382 for brass and L31382 for aluminum.
- Plate Height 1" x 3/4"
- Plate Width 1" x 3/4"




Stocked Product


| | |
|-------|-------------------------|
| FS455 | 605, 613, 619, 625, 626 |
|-------|-------------------------|

WS401 CVX & CCV Wall Bumpers

- Constructed in heavy-duty cast brass or aluminum base.
- Special retainer cup makes rubber tamper resistant.
- The WS401 CVX unit is designed with a convex rubber bumper, packed with wood screw and plastic anchor.
- The WS401 CCV unit is designed with a concave rubber bumper which avoids damage to locks with projecting buttons, packed with wood screw and plastic anchor.
- Designed with a convex rubber bumper packed with screw and drywall anchor.
- Unit is designed with a concave rubber bumper which avoids damage to locks with projecting buttons and is packed with screw and drywall anchor.
- WS401 CVX meets ANSI/BHMA 156.16 L12101 for brass and L32101 for aluminum.
- WS401 CCV meets ANSI/BHMA 156.16 L12251 for brass and L32251 for aluminum.



WS401CVX



WS401CCV

Stocked Product


| | |
|----------|----------------|
| WS401CCV | 26, 26D, 3, 15 |
| WS401CVX | 10B |

Ives - Floor Stops & Holders

WS406CVX

Convex Wall Door Stop with Plastic Anchor

- Wrought material
- Factory assembled backplate
- Concealed mounting
- Easy installation by inserting screw through small hole in rubber
- Conforms to ANSI A156.16 L22101 for brass, L42101 for aluminum and L52101 for stainless steel
- Packed with wood screw and plastic anchor

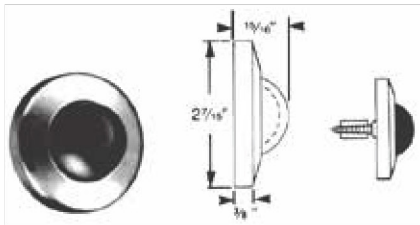


Stocked Product

WS406CVX 613, 625, 630

WS407CVX

Convex Wall Door Stop with Plastic Drywall Anchor

- Wrought material
- Factory assembled backplate
- Concealed mounting
- Easy installation by inserting screw through small hole in rubber
- Conforms to ANSI A156.16 L22101 for brass, L42101 for aluminum and L52101 for stainless steel
- Packed with wood screw and plastic anchor

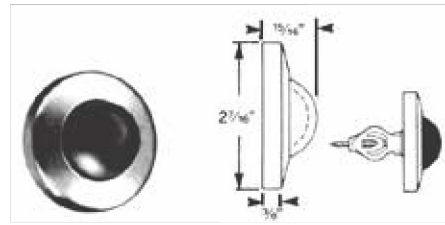


Stocked Product

WS407CVX 613, 625, 630

WS406CCV Concave Wall Door Stop with Plastic Anchor

- Wrought material
- Concave rubber permits knob to strike stop without damaging or engaging lock mechanism
- Factory assembled backplate
- Concealed mounting
- Easy installation by inserting screw through small hole in rubber
- Conforms to ANSI A156.16 L22251 for brass, L42251 for aluminum and L52251 for stainless steel
- Packed with wood screw and plastic anchor

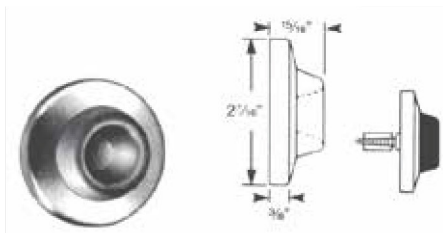


Stocked Product

WS406CCV 613, 625, 630

WS407CCV Concave Wall Door Stop with Plastic Drywall Anchor

- Wrought material
- Concave rubber permits knob to strike stop without damaging or engaging lock mechanism
- Factory assembled backplate
- Concealed mounting
- Easy installation by inserting screw through small hole in rubber
- Conforms to ANSI A156.16 L22251 for brass, L42251 for aluminum and L52251 for stainless steel
- Packed with plastic drywall anchor and screw

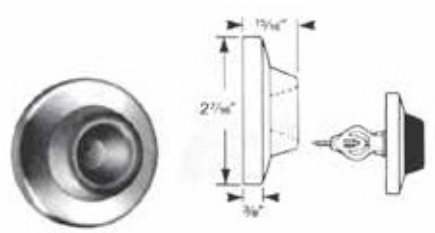

Stocked Product

WS407CCV 613, 625

Ives - Floor Stops & Holders

WS443 HD Wall Door Stop

- Cast material
- Designed for commercial applications
- Non-marring rubber tip
- Conforms to Fed. Spec. No. 1320E
- Conforms to ANSI A156.16 L12021 for brass and L32021 for aluminum
- Packed with expansion shield and lead shield
- 2-1/4" x 3-5/8" (Dia. x Proj.)



Stocked Product

WS443 626

WS445 HD Wall Door Stop & Holder

- Cast material
- Heavy duty for high traffic areas
- Resilient, non-marring rubber tip
- Conforms to Fed. Spec. No. 1321
- Conforms to ANSI A156.16 L11341 for brass and L31341 for aluminum
- Packed with expansion shield and lead shield for masonry type mounting
- 2-1/4" x 3-5/8" (Dia. x Proj.)



Stocked Product

WS445 10B, 26D

WS447 HD Wall Door Stop

- Cast material
- Designed for commercial applications
- Non-marring rubber tip
- Conforms to Fed. Spec. No. 1320
- Conforms to ANSI A156.16 L12011 for brass and L32011 for aluminum
- Packed with wood screw
- 2-1/4" x 3-5/8" (Dia. x Proj.)



Stocked Product

WS447 US26D

WS449 HD Wall Door Stop & Holder

- Cast material
- Heavy duty for high traffic areas
- Resilient, non-marring rubber tip
- Conforms to Fed. Spec. No. 1321
- Conforms to ANSI A156.16 L11341 for brass and L31341 for aluminum
- Packed with wood screw
- 2-1/4" x 3-5/8" (Dia. x Proj.)




Stocked Product

WS449 US26D

Ives – Roller Bumpers

RB471 4-1/2" Length Roller Bumper

- Cast material
- Designated to eliminate the possibility of interfering doors striking each other or of interlocking knobs
- For use where doors in a corner are of opposite hand
- Nos. 471 and 472 conform to Fed. Spec. No. 1341
- No. 471 conforms to ANSI A156.16 L12192
- Packed with sheet metal screws
- 471 2" dia. x 4-1/2" (base x Proj. A)

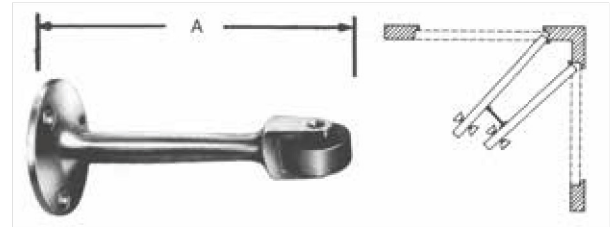

Stocked Product

RB471 626

Ives – Door Silencers

SR64

- For use on metal frames featuring pneumatic design that, once installed, forms an air pocket to absorb shock and reduce noise of door closing.
- Tamper-proof once installed on the frame.
- Proper installation also eliminates door rattle and provides constant tension for door latches or locks.
- Packed in bags of 100.
- Each bag has an installation tool included.
- Meets ANSI/BHMA 156.16, L03011
- Finish: gray



SR65

- For use on wood frames, also features pneumatic design to cushion shock and absorb noise.
- To prevent removal, a small brad should be driven into stop strip and through stem of silencer, as shown in the detail.
- Packed in bags of 100.
- Each bag has an installation tool included.
- Meets ANSI/BHMA 156.16, L03021
- Finish: gray



Ives – Commercial

MB1 & MB2 MOUNTING BRACKETS

Product Jamb Depth Stop Width

MB1 4-3/4" Min. Over 2-1/2"

MB2 4-3/4" Min. Up to 2-1/2"

Allows stop mounted hardware to be properly installed without damaging the coordinator.



Stocked Product

MB1 & MB2 USP

COR SERIES BAR COORDINATOR

- The COR series coordinators are designed for use on pairs of doors when one door needs to close before the other.
- All COR units function easily. The active door lever, located nearest to the active stop, holds the active door open until the trigger mechanism is released by the closing of the inactive leaf.
- All COR units are equipped with an override feature which allows the active door to close under extreme pressure.
- All COR units are compatible with flush bolts.
- The COR series does not cover the entire length of the stop, so a filler bar can be provided to maintain architecturally clean lines.
- Cor series coordinator channels and fillers are made of aluminum and are normally furnished US28 finish.
- Meets ANSI/BHMA A156.3, type 21A

Dimensions: 1-5/8" Wide x 5/8" Deep x Ordered Length



Stocked Product

COR52 x FL20 Filler Plate

LG1 LOCK GUARDS

- Units are non-handed and incorporate security frame pin to prevent separation of the door and frame.
- Unit covers the latch bolt area of the door and lock, thereby providing added protection from burglars, vandals or normal abuse.
- Ideal for use with mortise or cylindrical locks.
- Easy installation.
- Through bolted with carriage bolts and nuts.
- Finishes: Stainless steel - US32D, Steel - US2G



Stocked Product

LG1 US32D, US2G

Ives- Commercial Roller Latches

RL30

- Actuation is simple, closing of the door causes the roller to fall in the depression of the strike, thereby holding the door closed.
- The projection of the roller is easily adjusted using adjusting screws on the face of the unit.
- Maximum projection of the roller is 3/8" allowing for variance in the door clearance.
- Nylon Roller Standard.
- Forged Brass Construction.
- Meets ANSI/BHMA A156.16, E19091.
- Finishes: US3, US4, US10, US10B, US26, US26D.
- Optional Roller-F- Nylon covered brass roller.
- Optional Strike-A-ASA



Dimensions:

Body: 1 1/2" Wide x 3-3/8" Long x 1-11/16" Deep

Strike: 1-11/16" Wide x 2-1/4" Long x 5/32" Thick


Optional ASA Strike: STK726 (not shown): 1-1/4" wide x 4-7/8" long x 3/32" thick

Stocked Product

RL30 10B, 26D

RL32

- Actuation is simple, closing of the door causes the roller to fall in the depression of the strike, thereby holding the door closed.
- The projection of the roller is easily adjusted by turning knurled knob on back of latch.
- Maximum projection of the roller is 1/2" allowing for variance in the door clearance.
- Fits heavy-duty cylindrical tock cutout.
- Nylon Roller Standard.
- Non-handed.
- Brass or Stainless Steel Construction.
- Meets ANSI/BHMA A156.16, E191 01.
- Finishes: US3, US4, US10, US10B, US32, US32D.
- Optional Roller-F- Nylon covered brass roller.
- Optional Strike-A-ASA.

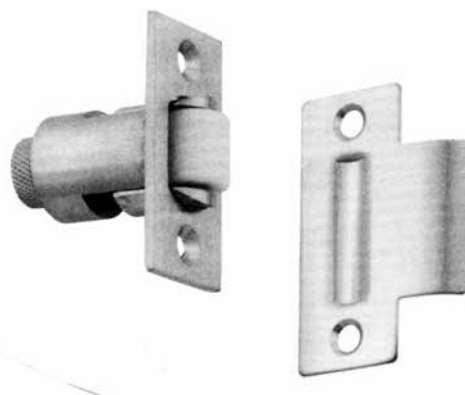

Dimensions:

Body: 1-1/8" Wide x 2-1/4" Long x 2-1/4" Deep

Strike: 1-1/8u Wide x 2-3/4" Long x 3/32" Thick

Optional ASA Strike: STK726 (not shown): 1-1/4" wide x 4-7/8" long x 3/32" thick

Stocked Product

RL32 10B, 26D

Ives – Vandal Resistant Trim

Vandal Resistant Trim


Features:

- Stainless Steel construction, 11 gage (0.120" thick).
- Thru-bolts and rugged mounting screws for maximum fastening strength.
- 1/4-20 screws and stainless steel finishing washers supplied with VR900 models; 10-24 screws supplied with VR910 models.
- Built-in lock protector prevents vandalism to mortise latchbolt (available on certain models).
- Extra-tough stainless steel cylinder collar prevents pipe wrench or similar tool from damaging cylinder. Tapered design prevents side impacts from transferring directly to cylinder. Collar spins freely.
- Sleek, attractive design.
- Furnished with mounting screws for door thicknesses of 1-3/4" to 2-1/4".
- Finish: US32D.
- Grip coated in black plastisol for softer touch and resilience to temperature extremes. Grip designed for comfortable operation.
- Meets ANSI/BHMA 156.13, Trim Security Test and California State Accessibility Standards Title 24.

VR910-DT

- For use with Von Duprin 98/99 Series Rim and Vertical exit devices.
- Thru-bolts directly to device.
- Pull operation only. No cylinder cutout.

| | |
|-------------------|-----------------|
| Width | 5-1/4" |
| Height | 11" |
| Thru-bolt pattern | 1-3/8" W X 7" H |
| Clearance to Door | 1-1/2" |
| Proj. | 1-7/8" |

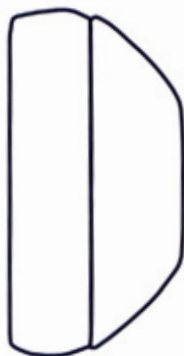


Stocked Product

32D

VR910-NI

- For use with Von Duprin 98/99 Series Rim and Vertical exit devices.
- Thru-bolts directly to device.
- Includes cylinder cutout.
- Tailpiece guide and cylinder cup provided.

| | |
|-------------------|-----------------|
| Width | 5-1/4" |
| Height | 11" |
| Thru-bolt pattern | 1-3/8" W X 7" H |
| Clearance to Door | 1-1/2" |
| Proj. | 1-7/8" |

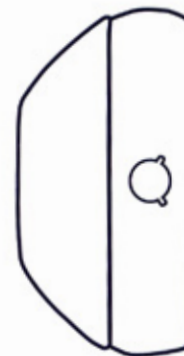

Stocked Product

32D