




SWING DOOR SYSTEM

THERMALLY ADVANCED

VENICE 4000-T

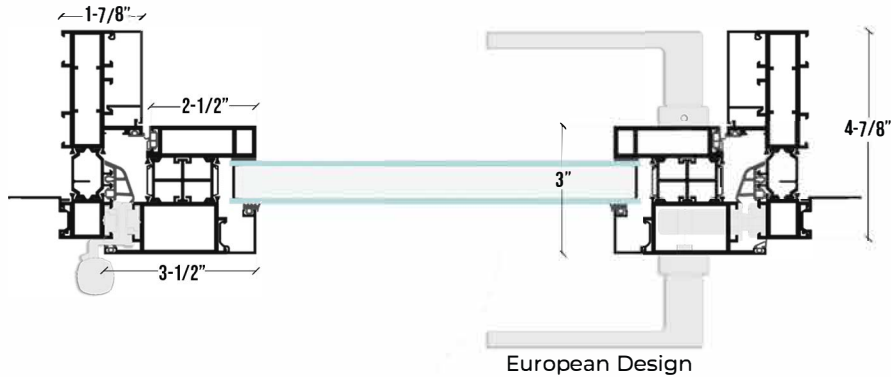

European Design

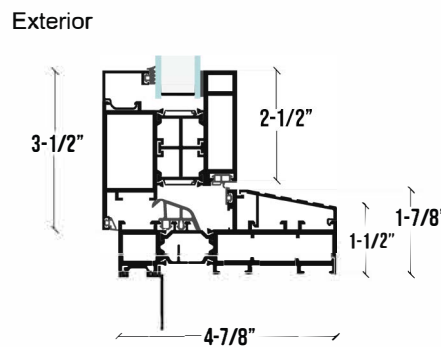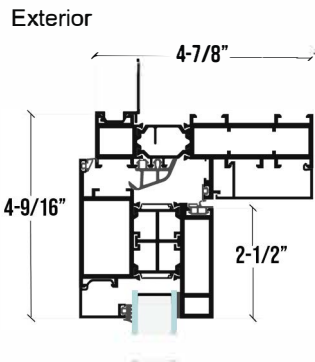

Available Swing Out or Swing In



Multi Point Lock

NFRC RATED
TITLE 24 COMPLIANT

U-FACTOR: 0.30 SHGC: 0.18

• NET DOOR + 4" WIDTH AND 4" HEIGHT = NFS

- 3" Thick Panels Suitable for High Wind Environment.
- Polyamide Struts that Create a Non-Conductive Bridge Between the Outside and the Inside of the door.
- 48" x 144" Max Dimension.
- Concealed 5-Multi-Point Locking System for Ease of Operation and Security.
- Superior Thermal and Structural Performance.

- Optional Sidelites and Transoms
- 1/2" Flush Threshold Optional.
- 1-7/8" W.P Standard Threshold.
- Concealed and Butt Hinges are available.
- Nail On Fin or Block Frame
- 1" Square SDL Bar "Simulated Steel Appearance".
- 3-1/2" Narrow Style & Rail Profile Doors.

HS **HARDWARE SOLUTIONS**

P: 619.737.9999
1690 W Frontage Rd, Chula Vista, CA 91911
www.glahs.com