


Section **8** **COMMERCIAL SADDLE THRESHOLDS**


Standard Sizes (Product is cut oversize to allow "cutting in"): 30", 32", 36", 42", 48" (cut 3/8" over); 60", 64", 72" (cut 1" over).  
**Other lengths are available** (Extra cost over 73").

**Routed thresholds (page 33) and specified lengths are cut exact.** Center holes are counter-sunk. **#10 phillips flathead screws of appropriate length are included.** Nominal min. wall thickness 1/8". Tabs avail. for 1/2" saddles. (page 33)

Special anchors may be required on concrete slab construction & are available at extra cost, see page 34.

 Barrier free design meets ADA requirements.


**1503** A, B  
 10 x 1" phillips flathead screws are included.

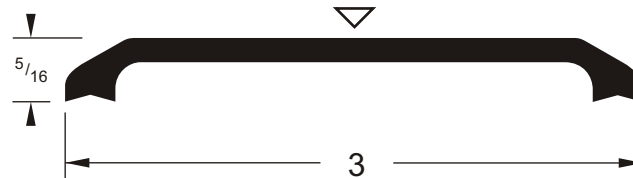


**1/2" COMMERCIAL SADDLE THRESHOLDS**

10 X 1-1/2" phillips flathead screws are included with parts 1504 - 1507


**1504** A, B

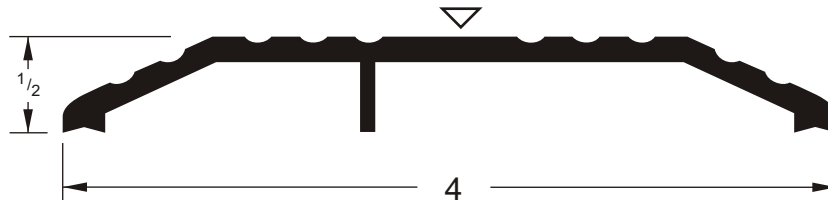


**1505** A, B

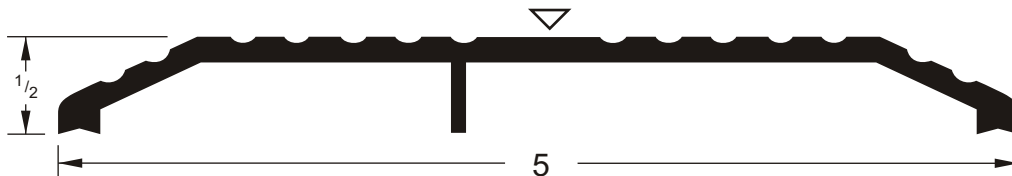

**1506** A, B

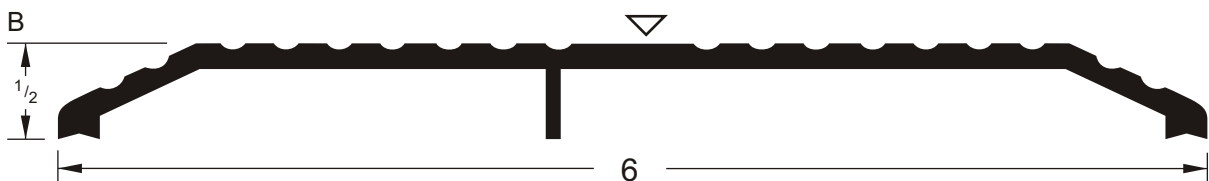

**1507** A, B

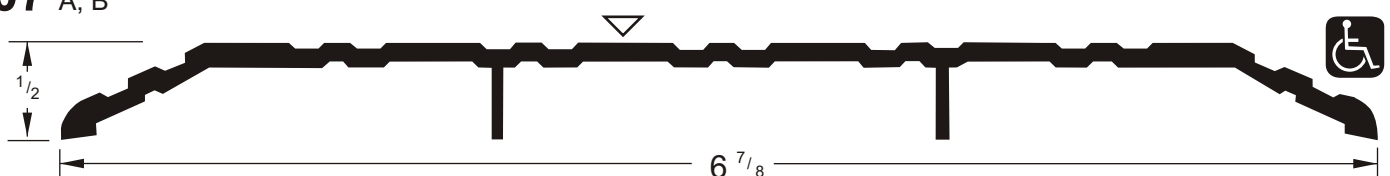


**PRODUCTS ARE SHOWN ACTUAL SIZE (EXCEPT AS NOTED)**


## HEAVY DUTY COMMERCIAL SADDLE THRESHOLDS

10 x 1-1/2" phillips flathead screws are included.

**1525** A, B

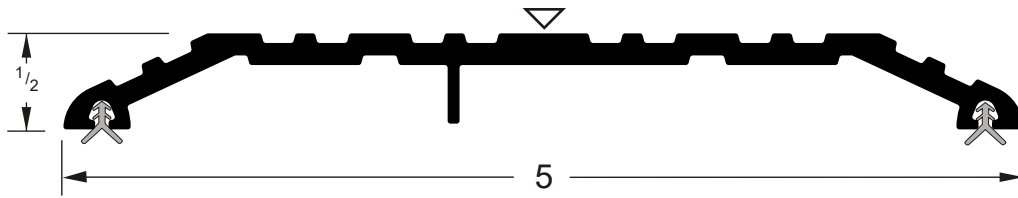


**1516** A, B

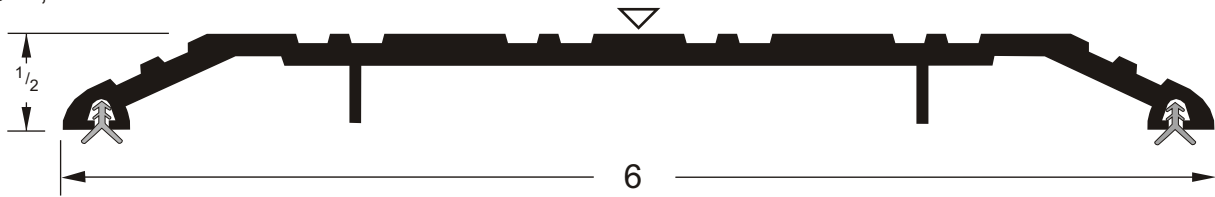


**1517** A, B




**1518** A, B

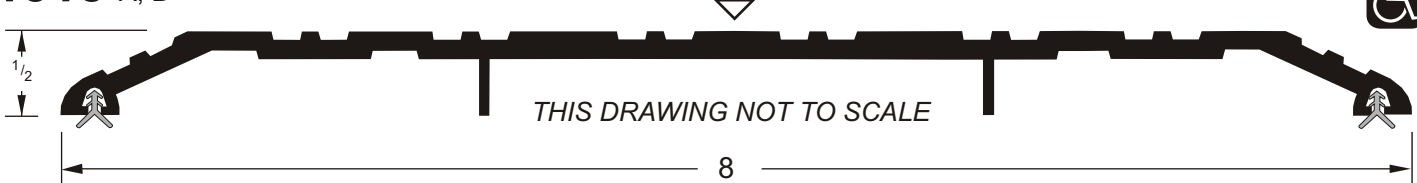

**1509** A, B

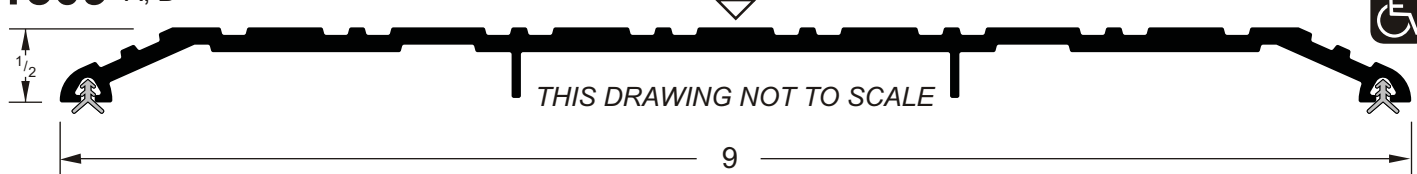


**1520** A, B

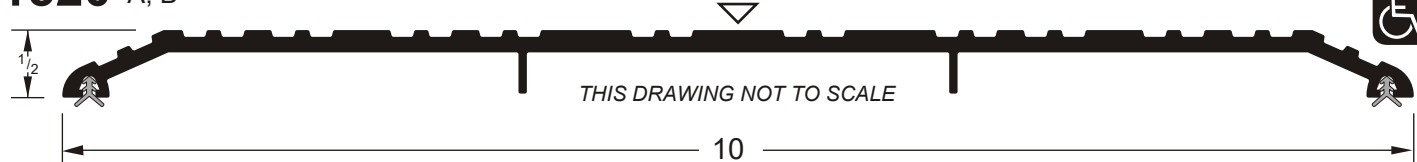


## SADDLE THRESHOLDS WITH SCREW BOSS

**1519** A, B

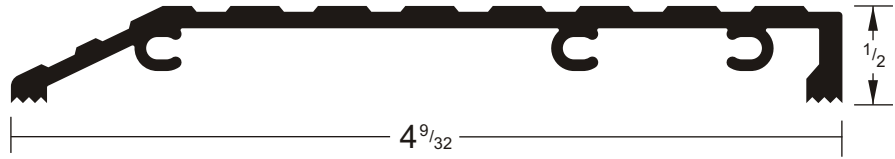

**1529** A, B

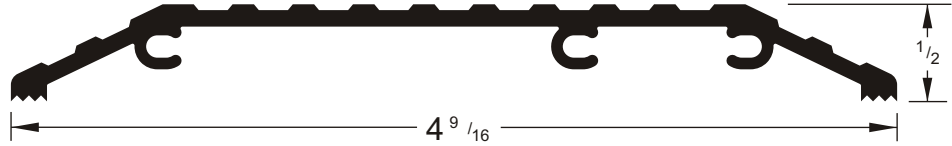


**1539** A




## 1/4" COMMERCIAL SADDLE THRESHOLDS

10 X 1" phillips flathead screws are included.


**1544** A, B

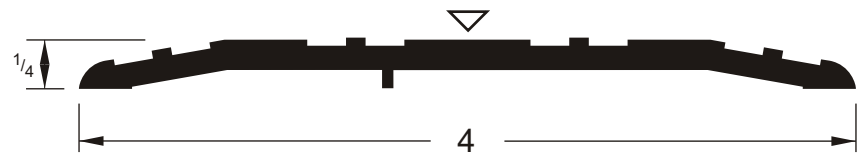

**1545** A, B

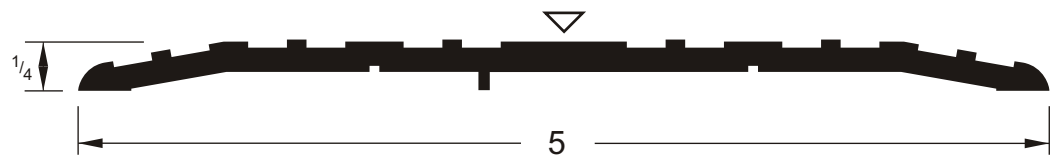


**1546** A, B

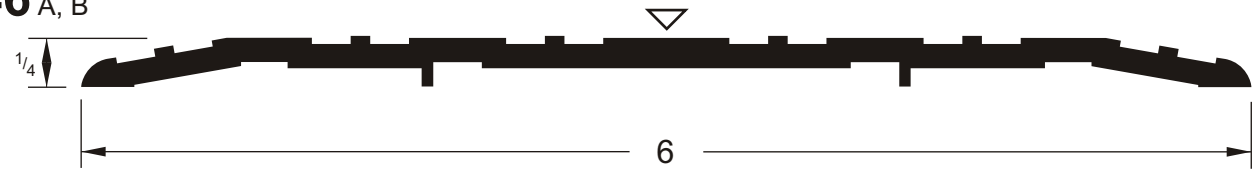

**1547** A, B



**1548** A, B

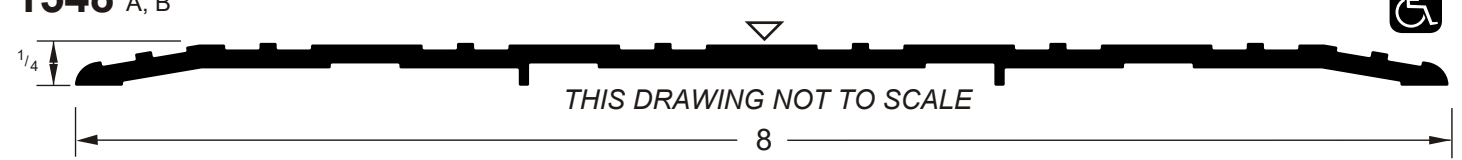


*THIS DRAWING NOT TO SCALE*

**PRODUCTS ARE SHOWN ACTUAL SIZE  
(EXCEPT AS NOTED)**

**THERMAL BREAK SADDLE THRESHOLDS**

10 x 1-1/2" phillips flathead screws are included.

**1512** A, B

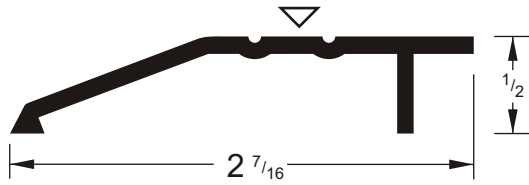


**1511** P





Black rigid vinyl thermal break connector to join saddles.



**1514** A, B

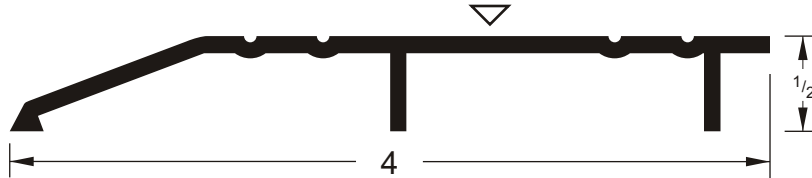

**1515** A, B

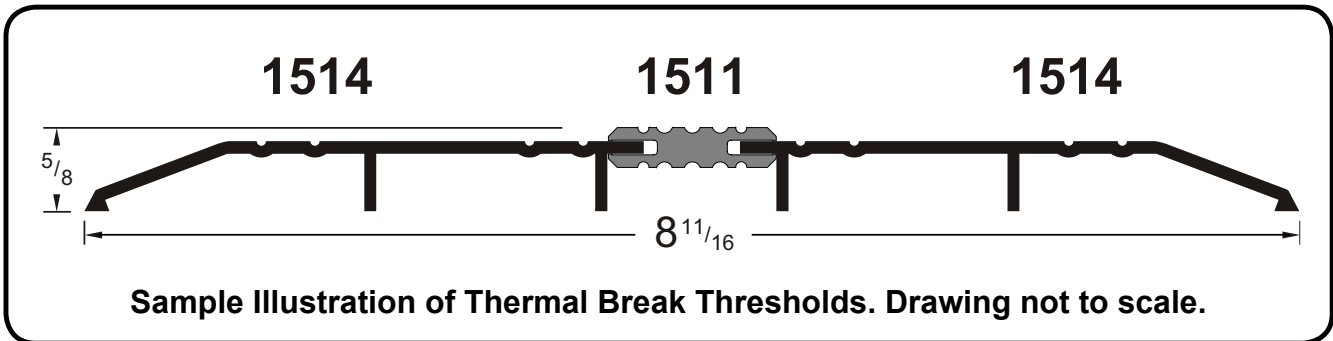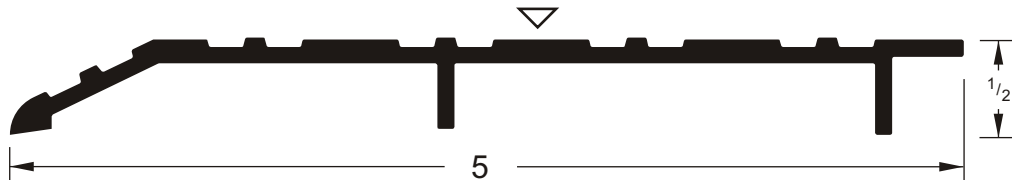

**ELEVATORS**

**3105**


B While supplies last

1/4" Elevator for increasing height of saddle thresholds.



**ROUT FOR METAL/MORTISED FRAMES**


(RMF) A milling operation to remove aluminum, enabling the threshold to be "dropped" into place.

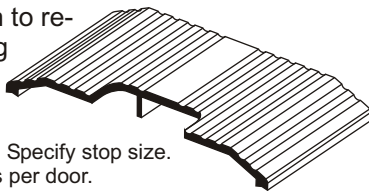

**Order:** Exact length required. Specify stop size.  
**Holes:** Three (3) center holes per door.

**TABS**

Tabs can be attached to 1/2" commercial saddle thresholds to facilitate the connection between thresholds and wood frame.

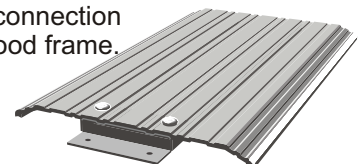


**Order:** Exact length required.  
**Holes:** No center hole.

**1522** A, B


PANIC exit bumper threshold. Handicapped barrier-free design.

10 x 1" phillips flathead screws are included.

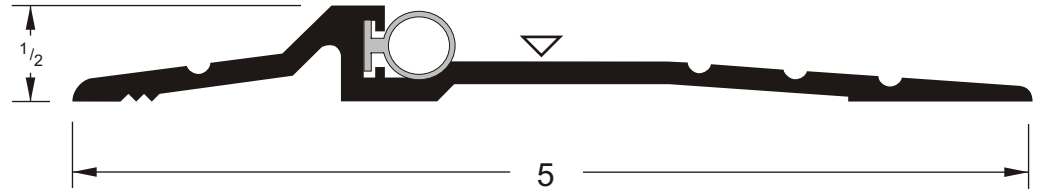

**1523** A, B


10 X 1 1/2" phillips flathead screws are included.

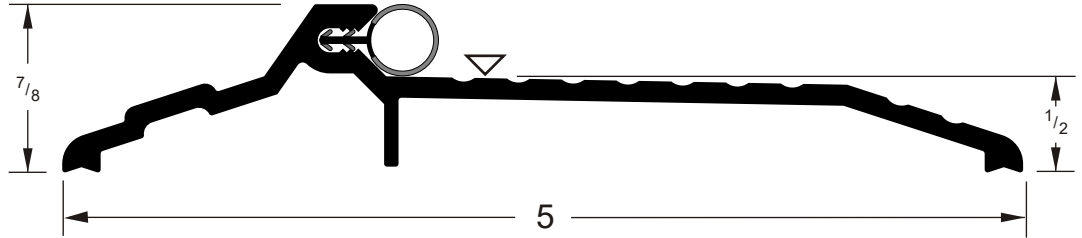

**HALF SADDLE**

**1564** A, B

10 x 2" phillips flathead screws are included.

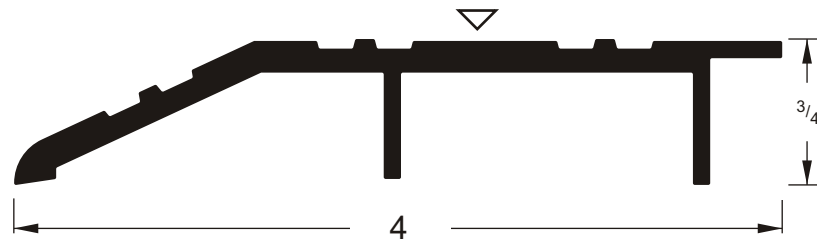


▽ Indicates location of standard fastener hole.

**SPECIAL ANCHORS**  
(NOT TO SCALE)


Fasteners other than standard may be substituted at the time of ordering at additional cost. Bulk fasteners are available per hundred or per pound.




Machine screw with **lead anchor**.  
10-24 x 2", 3/8" hole required.  
Zinc & bronze.



**Lock anchor**, zinc plated only.  
1/4" x 2", 1/4" hole required.



**Nylon drive anchor**. 1/4" x 1-1/2", 1/4" hole required.



**Nylon drive anchor**. 1/4" x 2",  
1/4" hole required.



**Plastic screw anchor**. 1/4" x 1",  
1/4" hole required.

**PRODUCTS ARE SHOWN ACTUAL SIZE  
(EXCEPT AS NOTED)**