


COOL™

Retractable Screen Door

HS HARDWARE SOLUTIONS

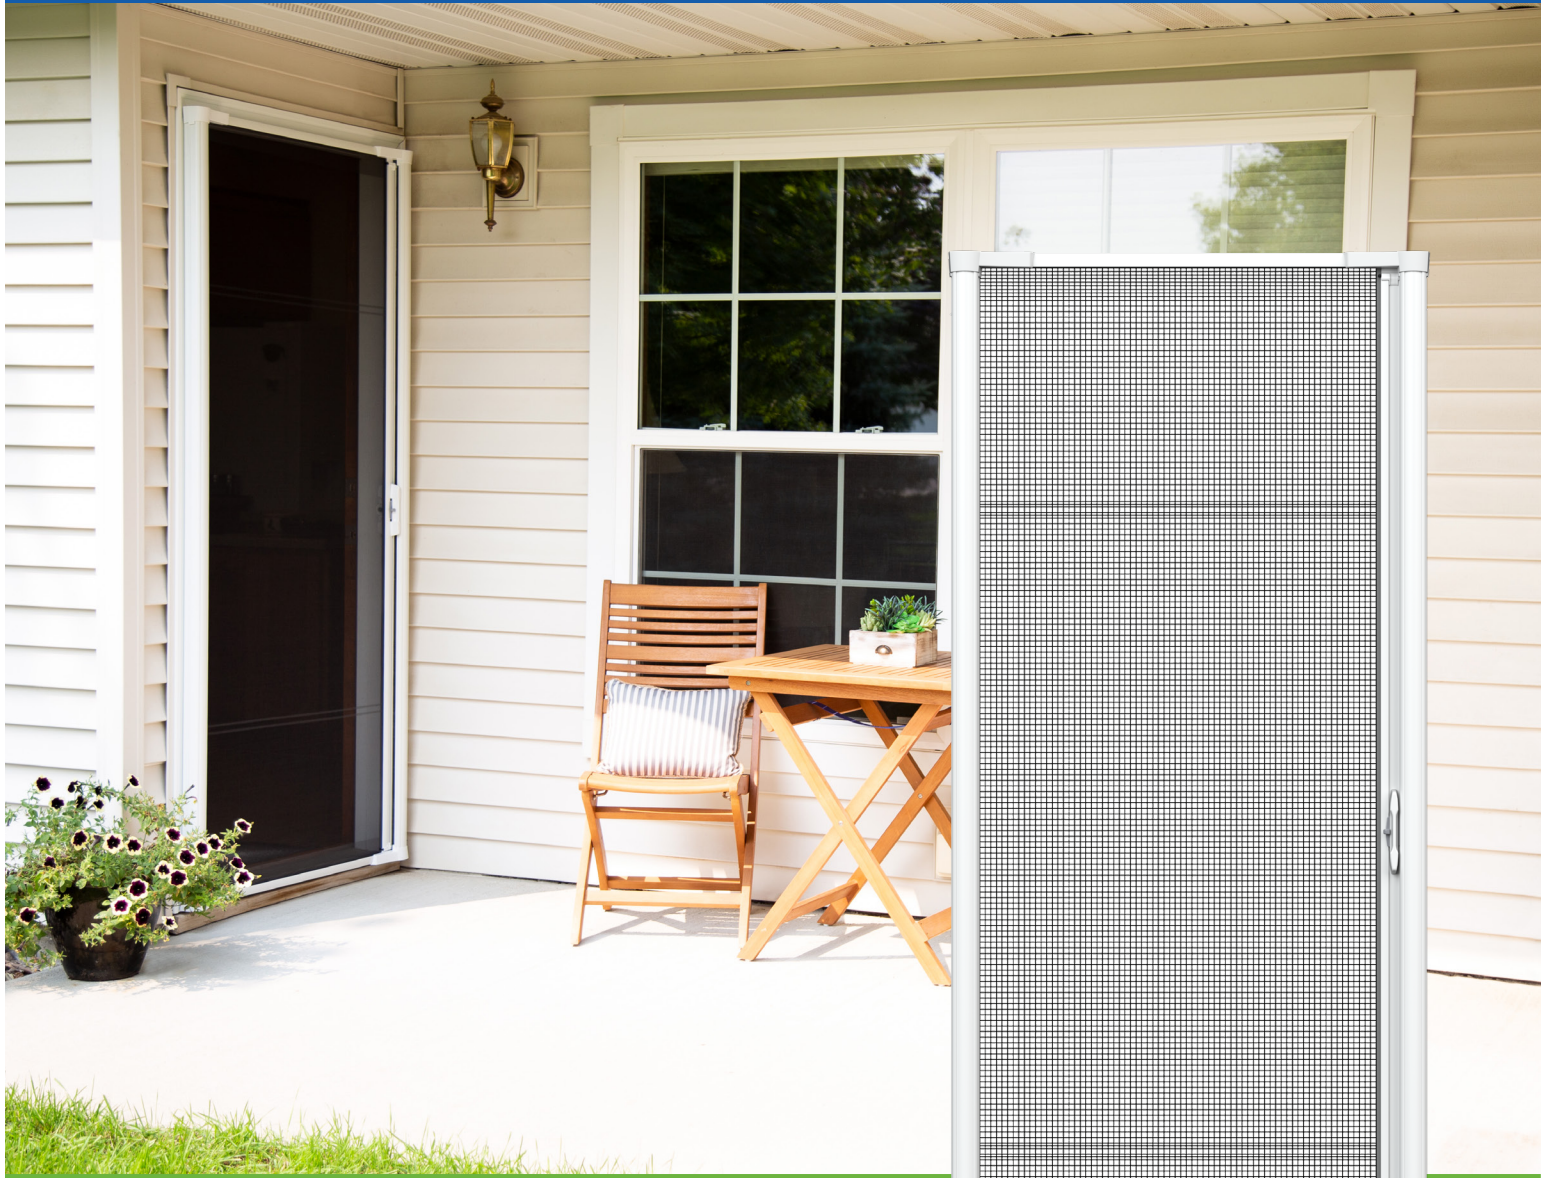

For single, double or sliding doors.

With innovative features, our COOL™ retractable screen door delivers convenient fresh air with quick installation, ergonomic design and durable construction for an ideal connection point to the outdoors.

Quick & Easy Installation

- Quick-snap track fits most standard size single doors.
- 30-minute installation.*
- Option for right- and left-hand applications.

Durable Construction

- Durable, rust-resistant aluminum housing and track.
- Subtle safety stripes provide faint visual cues to help prevent walk-throughs.

Ergonomic Design

- Features a latch / lock handle for simple and secure single-hand operation.
- EZ-Glide System for steady and smooth operation.

White

Sandstone

Brown

Black

*Based on average DIY skills and standard door application, 32"-36" wide (single), 68"-72" wide (double).

COOL™ Retractable Screen Door

Product Description

COOL™ Retractable Screen Doors offer homeowners a fresh approach to traditional screen doors. Like hinged screen doors, COOL allows fresh air to circulate into the home, but without all the banging and slamming and in-the-way hassles of a traditional hinged screen door. COOL's full-view screen also fully retracts when not in use so it doesn't get in the way.

Key Benefits

If you have 30 minutes, we have the solution.

- Installs in 30 minutes or less
- Adjusts to fit door widths of 32" to 36" without cutting metal
- Installs on all sill types – flush, short and long
- Adjusts easily to a left or right hand application
- One tool required – power screwdriver
- Only 5 components to assemble

Designed to last.

- Limited Lifetime warranty
- Powder coated aluminum housings and tracks
- All paints and resins include UV inhibitors
- Durable fiberglass screen mesh

COOL is smartly designed with ease of installation in mind. No metal cutting is required and only a power screwdriver is needed to install five components in only 30 minutes. COOL will install on all sill types and will adjust to fit door widths of 32 to 36 inches without cutting metal.

More gliding. Less slamming.

- Spring tension is 40% less than other screens
- Easy one-handed operation
- Mechanical latch and lock
- Smooth retraction speed with no banging
- Screen retracts all the way without assistance
- Ergonomically designed latch/lock handle

Durability has never been so beautiful.

- Screen retracts out-of-sight when not needed
- Face-mount installation creates pass-through space
- Housing design blends into brick mold
- 3 Colors available – White, Bronze and Sandstone (Slider white only)
- Subtle safety strips provide faint visual cues to help prevent walk-through



SINGLE DOOR



SLIDING DOORS



DOUBLE DOORS

DOOR TYPE*	HEIGHT	COOL™ FRAME	FITS DOOR SIZES
Single Door	Standard	32" to 36" W x 81 3/8" H	32" to 36" W x 80" H
Sliding Door	Standard	32" to 36" W x 79" H	32" to 36" W x 80" H
Double Door	Standard	68" to 72" W x 81 3/8" H	68" to 72" W x 80" H
Single Door	Tall	32" to 36" W x 97 3/8" H	32" to 36" W x 96" H
Single Door	Short	32" to 36" W x 79" H	32" to 36" W x 78" H
Double Door	Short	68" to 72" W x 79" H	68" to 72" W x 78" H
Double Door	Tall	68" to 72" W x 97 3/8" H	68" to 72" W x 96" H

MATERIALS – (all exposed materials and paint have UV inhibitors)

Vertical Housings	Powder coated aluminum
Handle Bars	Powder coated aluminum
Tracks	Powder coated aluminum
Plastic Components	Acetal
Screen	Fiberglass

SCREEN REPLACEMENT CARTRIDGES

Standard Height
Sliding and Short Height
Tall height

OPERATION

Installs on the face of the brick mold (door frame).
Latch/Lock Handle with hook holds screen closed. Latch can be locked.

COLORS	EXCLUSIONS
White	None
Bronze	Sliding Door Model
Sandstone	Sliding Door Model

MAINTENANCE

Vacuum tracks and add furniture polish as needed to improve retraction performance
--


WARRANTY

Limited Lifetime Warranty – Does not include screen mesh
--

*All door types can be used in in-swing or out-swing installation applications.

Face Mount Installation

Provides full air flow, unobstructed view, and pass-through space

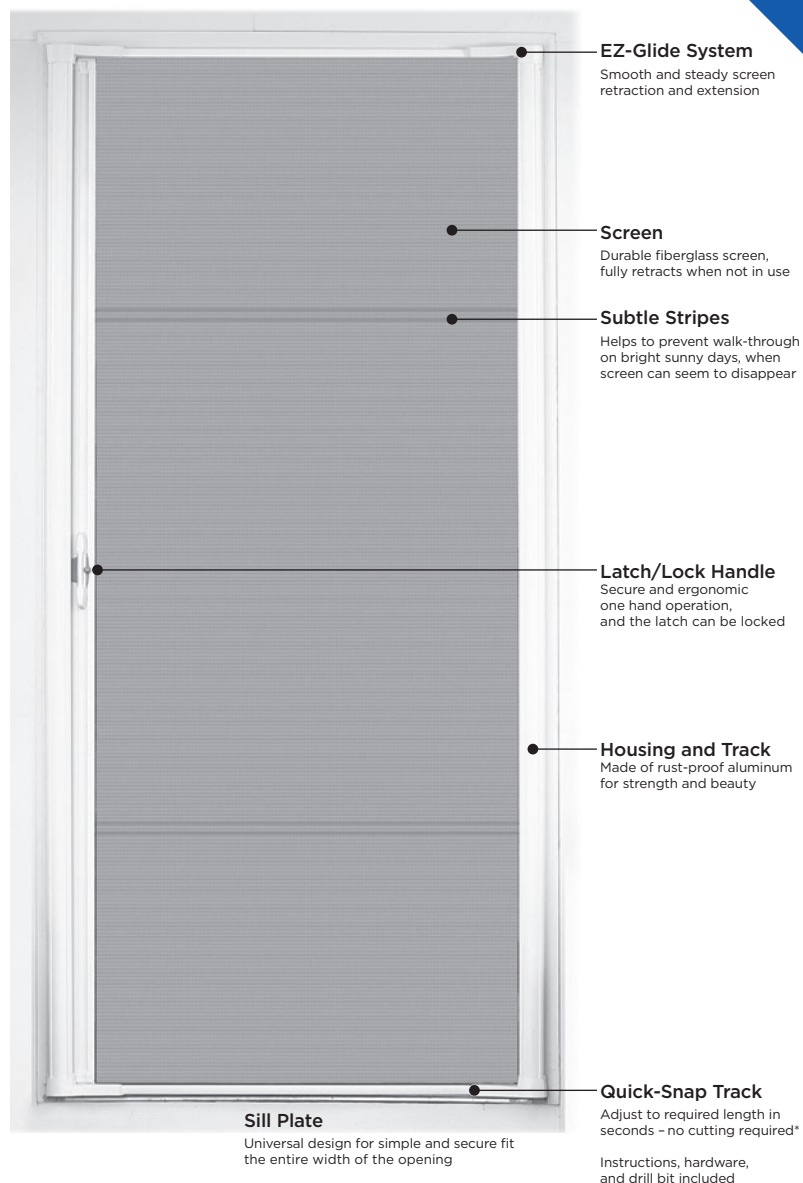

Let's get technical.

A mounting flange is positioned 1-1/16" from the outer edge at the back of the screen housing and decorative housing. The mounting flange requires this 3/4" depth for mounting to the side brickmould/door trim.

