




COMPLETE WINDOW, DOOR, SHOWER, RAILING & STOREFRONT SYSTEMS • B2B GLAZING SUPPLIES

1690 W FRONTAGE RD. CHULA VISTA, CA 91911 • GLAHS.COM • 619-737-9999


DOOR PACKAGE MEASUREMENT GUIDE

A DOOR PACKAGE CONSISTS OF: Door • Door Header • Door Jambs • Threshold

SINGLE DOOR

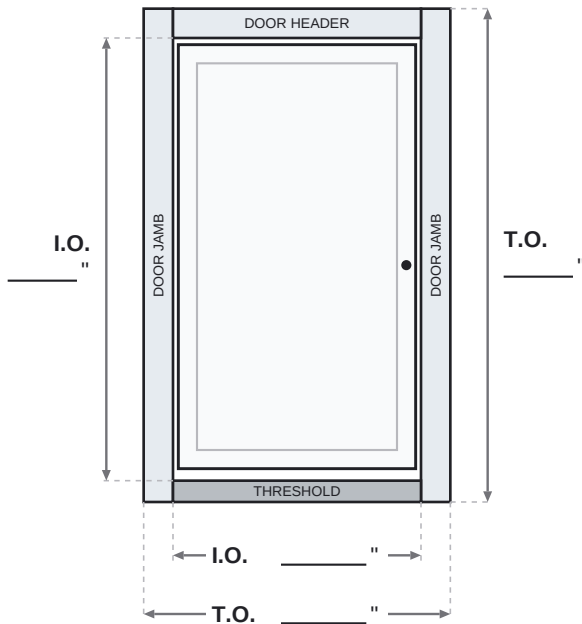

DOUBLE DOOR (PAIR)

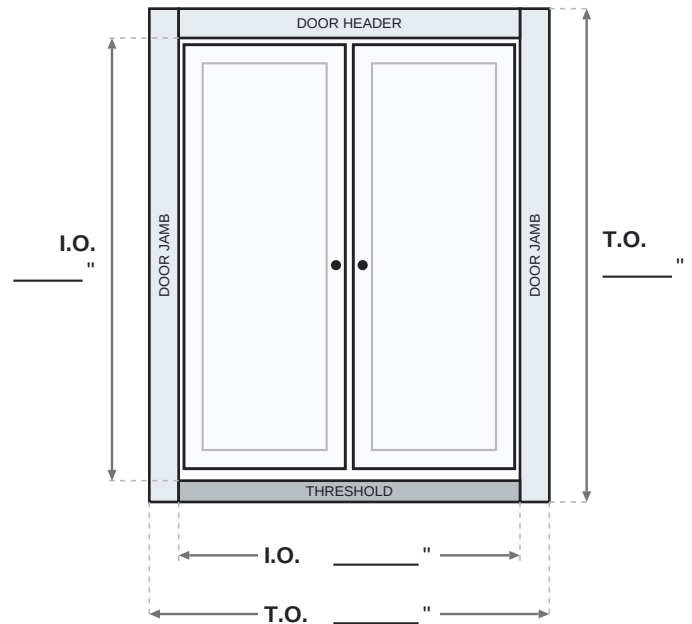

IMPORTANT FACTS

- I.O.** **Inside Opening** – equal to the length of the door header and threshold.
- T.O.** **Total Opening** – the net frame dimension.
- N.F.D.** **Net Frame Dimension** – outside jamb to jamb, top of header to the bottom of threshold.
- Threshold** most commonly ½" high; available in different heights, widths and profiles to suit the application.
- R.O.** **Rough Opening** – the actual job-site opening created by contractors to install a door package.

MOST COMMON DEDUCTIONS

- 1/8" between header and door
- 3/16" to 1/4" between door and threshold

STANDARD SIZES & RECOMMENDED ROUGH OPENINGS

Standard 3/0 x 7/0 door and frame package (includes jambs, header and threshold) — door leaf net size: **35-3/4" x 83-1/8"**

COMPLETE STOREFRONT DOOR PACKAGE	FRAMING	RECOMMENDED R.O.
Single Door 3/0 x 7/0	1-3/4" x 4"	40" x 86"
Single Door 3/0 x 7/0	2" x 4-1/2"	40-1/2" x 86-1/4"
Double Door 6/0 x 7/0	1-3/4" x 4"	76" x 86"
Double Door 6/0 x 7/0	2" x 4-1/2"	76-1/2" x 86-1/4"